

Fixing parts: pins, clamps and screw covers

Drop nose pin

Stainless steel clevis pin with with spring loaded locking mechanism.

Code	Size mm	Code	Size mm	Code	Size mm
37.107.01	6x15	37.107.04	8x35	37.107.07	10x25
37.107.02	6x25	37.107.05	10x35		
37.107.03	8x20	37.107.06	10x45		




Drop nose pins

Made of **stainless steel**; with spring locking mechanism and safety tooth.



▲ 37.266.xx; 37.268.xx;
37.270.xx (Type A)



▲ 37.267.xx; 37.269.xx;
37.271.xx (Type B)

Net length "L" mm	Ø 6 mm Type A	Ø 6 mm Type B	Ø 8 mm Type A	Ø 8 mm Type B	Ø 10 mm Type A	Ø 10 mm Type B
20	-	37.267.20	-	37.269.20	-	-
30	37.266.30	37.267.30	37.268.30	37.269.30	37.270.30	37.271.30
40	37.266.40	37.267.40	37.268.40	37.269.40	37.270.40	37.271.40
42	37.266.42	-	-	-	-	-
50	37.266.50	37.267.50	37.268.50	37.269.50	37.270.50	37.271.50
60	37.266.60	-	37.268.60	37.269.60	37.270.60	37.271.60
80	-	-	37.268.80	37.269.80	37.270.80	37.271.80
100	-	-	-	-	-	37.271.10

Suitable to fasten "Laser" vangs.

Stainless steel clevis pins

Multipurpose, **split ring not included**.

Code	Ø mm	Length mm	Code	Ø mm	Length mm	Code	Ø mm	Length mm
37.106.18A	4	10	37.106.20B	5	15	37.106.21C	6	20
37.106.18B	4	15	37.106.20C	5	20	37.106.21D	6	25
37.106.18C	4	25	37.106.21A	6	10	37.106.22	7	15
37.106.20A	5	10	37.106.21B	6	15	37.106.23	8	20



Stainless steel ring


Code	Size mm
37.106.01	13x0,8
37.106.02	17x1
37.106.03	18x1,2



Stainless steel self-locking pin with double bearing lock

Fitted with **spring balls** on one end and ring on the other end; ideal for tent forks (46.662.00; 46.662.20; 46.662.22; 46.653.20; 46.653.22) boarding ladders, boom fittings, anchor locks etc.. and wherever safety is required without having to fasten screws.

Code	Ø mm	Length mm		ORDER BY BOX
		tot.	usable	
37.264.10	6	25	12	10
37.264.15	6	38	25	10
37.264.20	6	51	38	10
37.264.25	6	64	51	10
37.264.30	6	76	64	10

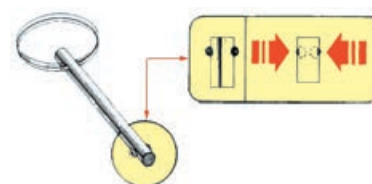

Nylon tarpaulin lacing buttons

Available in colors black or white.

Code	Type	Colour	ORDER BY BOX
37.256.10BI	With 4.5-mm hole	White	100
37.256.10NE	With 4.5-mm hole	Black	100
37.256.50BI	With ball*	White	100
37.256.50NE	With ball*	Black	100



▲ 37.256.10



▲ 37.256.50

* Specially suited to be used with **elastic** cable.